


FEEDER WITH INTEGRATED FOLDING UNIT

Application

Inline dispensing of cover sheets, which are folded directly in the outlet extension using an integrated pneumatic folding unit. These are then precisely dispensed onto the product stack.

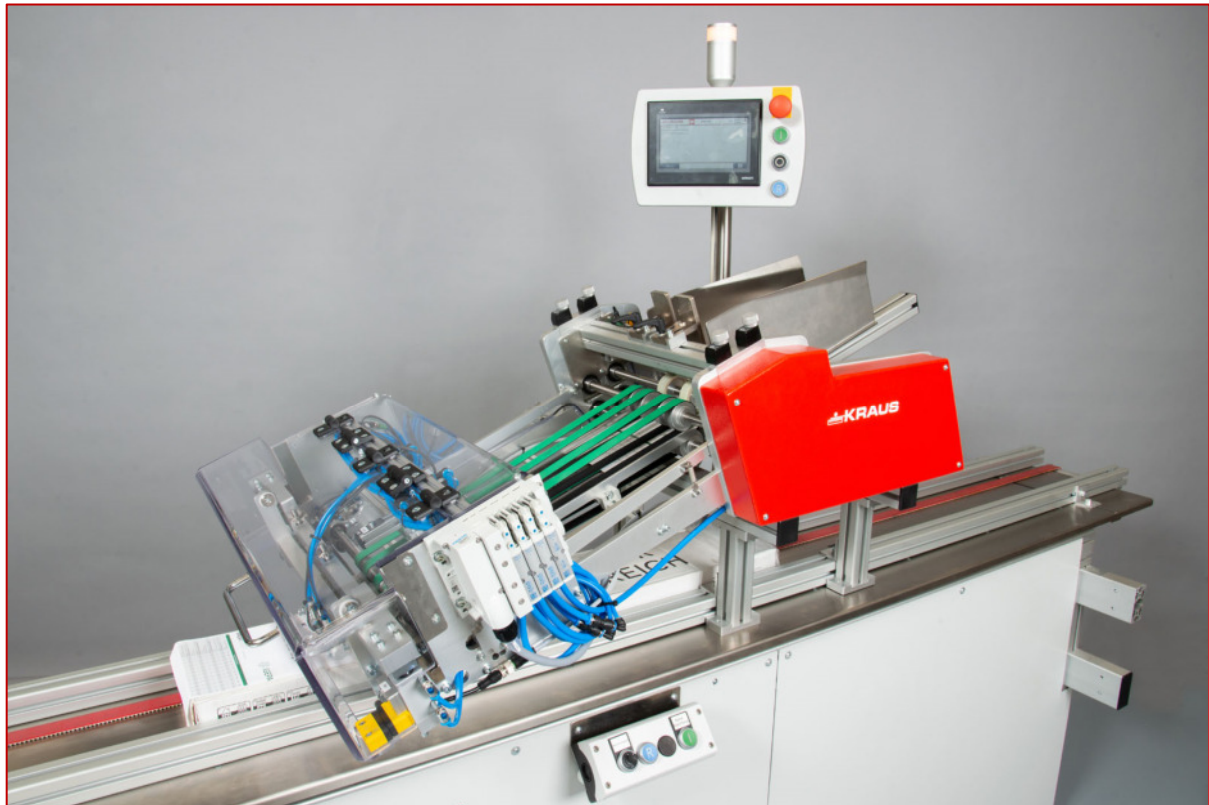

Advantage


The system can be used to reliably process a large number of cover sheets.

With the help of the integrated pneumatic folding unit, the desired distance to the front edge can be folded and dispensed with the exact position using the JoKer servo. The print of the cover page is legible both on the front and back. The folding can be flexibly adjusted via the PLC control and can also be deactivated for simple dispensing without folding.

Functionality

The feeder reliably separates the cover sheet. In the outlet extension of the feeder, the already isolated cover sheet is folded using the integrated pneumatic folding unit and can then be dispensed onto the product in one pass.

FEEDER WITH INTEGRATED FOLDING UNIT

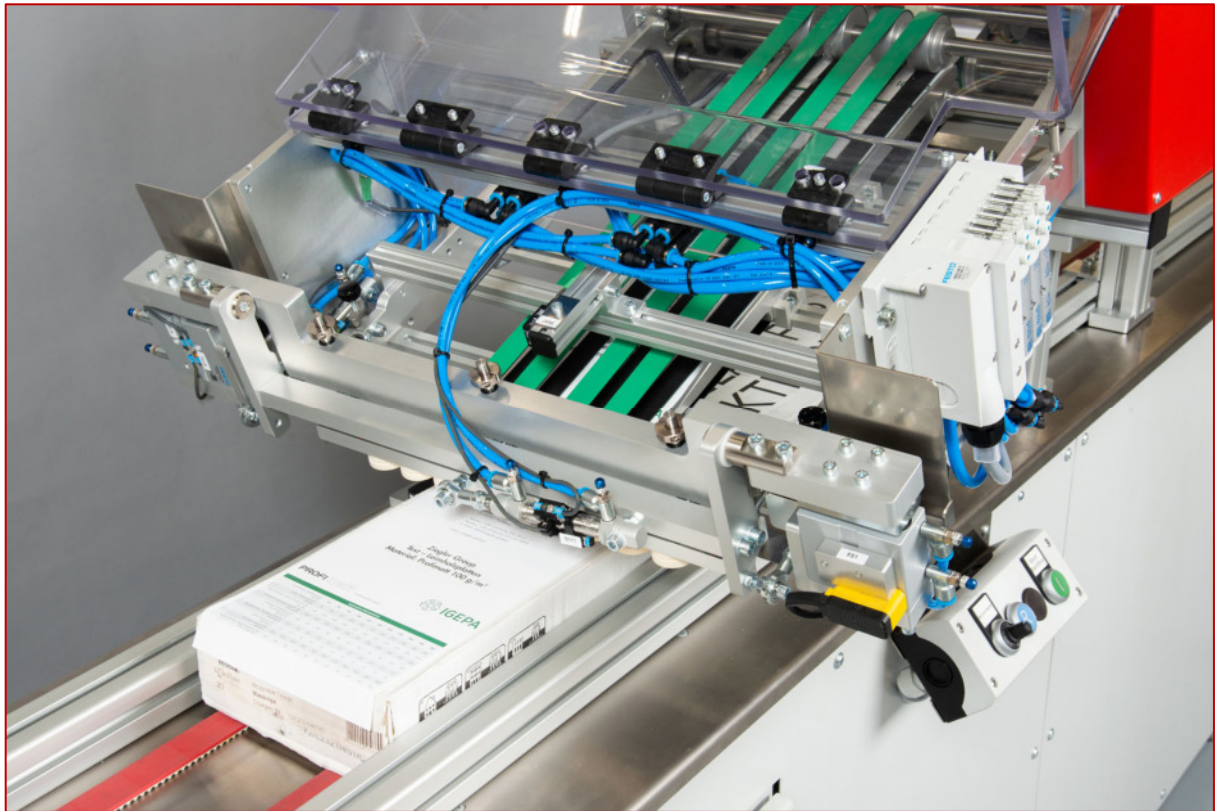

pneumatic folding unit.

Technical specifications

- Speed approx. Speeds up to 150 m / min.
- Mains connection: 230V / 50/60 Hz.
- Control: PLC control.
- Air gap setting: 0 - 10 mm standard, with folding up to 120 g / m².
- Formats: min. 100 x 150 mm, max. 350 x 800 mm.
- Magazine: 300 mm.

Customization

We are happy to work out the right concept for you and offer you the solution that is right for you. Talk to our project planning department about the possibilities.